


C-Band PLL LNB Applications

SM-300 series

Outline Drawing

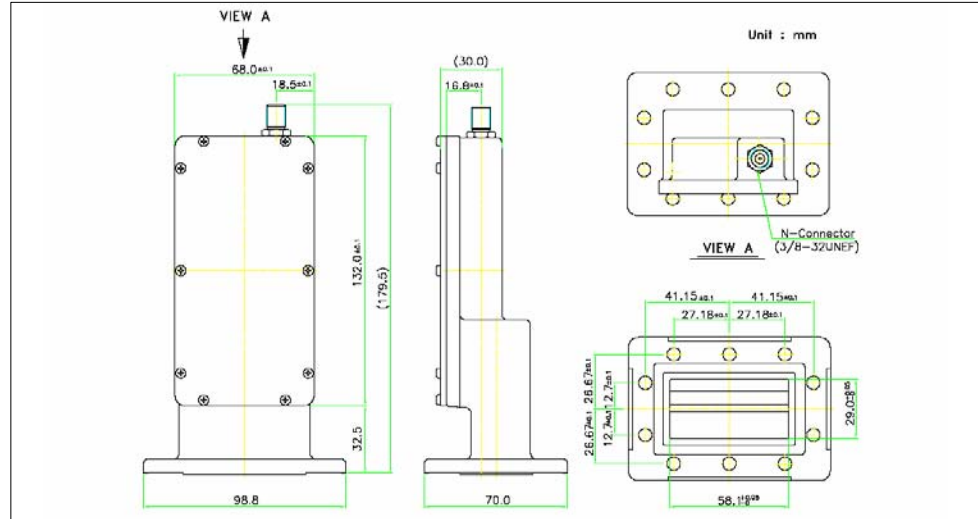

Model No & Frequency, Stability

Model No	Input Freq.(GHz)	Output Freq.(MHz)	L.O Freq. & Stability
SM-305	3.4 – 4.2	950 – 1750	5.15 GHz+/- 5 KHz
SM-310	3.4 – 4.2	950 – 1750	5.15 GHz+/- 10 KHz
SM-325	3.4 – 4.2	950 – 1750	5.15 GHz+/- 25 KHz

Specifications

Parameter	Specification
Noise temperature (@+25°C)	30°K max.
Input VSWR	2.5 : 1 max.
Image rejection	45 dBc min.
Conversion gain	65dB typ. 55dB min. 70dB max.
Output VSWR	2.5 : 1 max.
Gain flatness	4 dBp-p max.
Gain ripple (@per 27 MHz segment)	+/- 0.5 dB max.
1dB gain compression point	+3 dBm min.
Output impedance	75, 50 ohms
Leakage (@ input port)	-45 dBm max.
Phase noise	-65 dBc/Hz @1KHz offset -80 dBc/Hz @10KHz offset -95 dBc/Hz @100KHz offset
Power supply	+12 to +24V DC
Required current	250 mA max.
Operating temperature	-40°C to +60°C
Storage temperature	-40°C to +80°C
Relative humidity	0% to 95% RH
Input waveguide flange	WR- 229
IF output connector	F-Type female, N-Type female
Weight	575 g



A-Telecom Co., Ltd.
 22-4, Palyong-Dong, Changwon, Kyungnam, Korea 641-847
 Tel : 82-55-299-8550, Fax : 82-55-299-8552
 http://www.a-tele.com, E-Mail : a-tele@a-tele.com