


# C-Band One Cable Solution LNBF Applications

## SPL-4400

### Outline Drawing

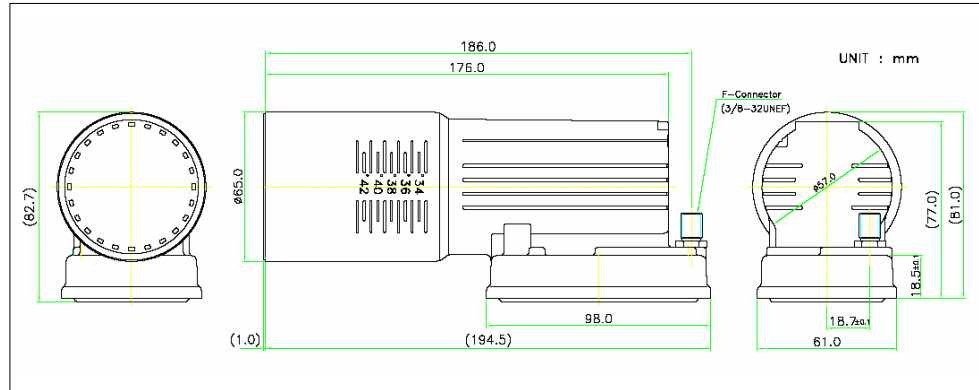

### Model No & Frequency, Stability

Model No	Input Freq.(GHz)	Output Freq.(MHz)	L.O & Stab.(Over Temp.)
SPL-4400	3.7 - 4.2	950 - 1450	5.15 GHz +/- 2 MHz
		1550 - 2050	5.75 GHz +/- 2 MHz

### Specifications

Parameter	Specification
Noise temperature (@ +25°C)	35'K max.
Input VSWR	2.5 : 1 typ.
Image rejection	40 dB min.
Conversion gain	65 dB typ. (55dB min. 70dB max.)
Output VSWR	2 : 1 typ.
Gain flatness	6 dBp-p max.
Gain ripple (@ per channel)	+/- 0.75 dB max.
1dB gain compression point	0 dBm min.
Output impedance	75 ohms
Leakage (@ Input port)	-45 dBm max.
Phase noise	-65 dBc/Hz (@1 KHz) -80 dBc/Hz (@10 KHz) -95 dBc/Hz (@100 KHz)
Power supply	+12 to +24V DC
Required current	260 mA max.
Operating temperature	-30°C to +60°C
Storage temperature	-40°C to +80°C
Relative humidity	0% to 95% RH
Input waveguide flange	WR- 229
IF output connector	F-Type female
Weight	520 g



A-Telecom Co., Ltd.  
 22-4, Palyong-Dong, Changwon, Kyungnam, Korea 641-847  
 Tel : 82-55-299-8550, Fax : 82-55-299-8552  
 http://www.a-tele.com, E-Mail : a-tele@a-tele.com